


WS-7014U
Wireless 433 MHz
Radio-controlled Weather Station

Instruction Manual

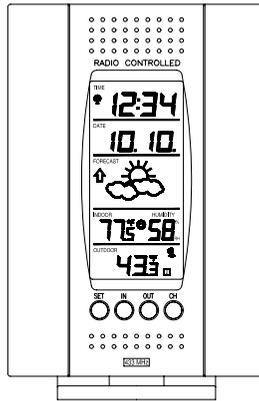



LA CROSSE *tools and technology*
TECHNOLOGY *for home and office*

TABLE OF CONTENTS

Topic	Page
Inventory of Contents/Additional Equipment	3
About WWVB	3-4
Quick Set-Up Guide	4-5
Detailed Set-Up Guide	
Battery Installation	5-6
<i>Program Mode</i>	
Function Keys	7
12/24 hour Time Setting	7
Time Zone Setting	7-8
Daylight Saving Time Setting	8-9
Time Setting (WWVB & Manual)	9-10
Setting Day, Date, and Year	10-11
Selecting °F or °C	11
Setting the LCD Contrast	11-12
Features	
Weather Forecast Icons	12-13
Indoor Temperature, Humidity, & Comfort Level Indicator	13
Outdoor Temperatures	14
Minimum & Maximum Records (Indoor, Outdoor, & Resetting)	14-15
Additional Remote Control Sending Units (Set-Up, Viewing, & Operation)	15-17
Mounting	17-19
Troubleshooting	20-21
Maintenance & Care	22
Specifications	23
Warranty Information	24

INVENTORY OF CONTENTS

1. The Weather Station (Figure 1).
2. One TX6U Remote Control Sender with mounting bracket (Figure 2).
3. Three each, ½” Philips screws.
4. One strip double-sided adhesive tape.
5. Instruction Manual and Warranty Card.

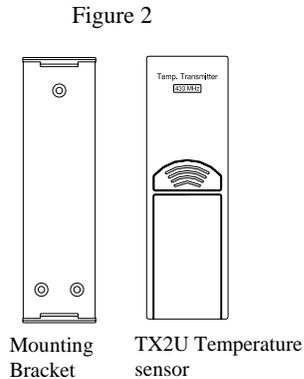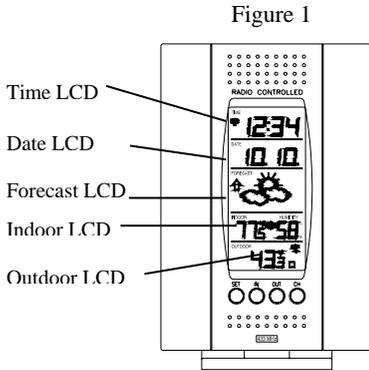

ADDITIONAL EQUIPMENT (not included)

1. Two fresh AA 1.5V batteries for weather station.
2. Two fresh AA 1.5V batteries for sensor.
3. One, Philips screwdriver for mounting.

ABOUT WWVB (Radio Controlled Time)

The NIST (National Institute of Standards and Technology—Time and Frequency Division) WWVB radio station is located in Ft. Collins, Colorado, and transmits the exact time and date signal continuously throughout the United States at 60 kHz. The signal can be received up to 2,000 miles away through the internal antenna in the Weather Station. However, due to the nature of the Earth’s Ionosphere, reception is very limited during daylight hours. The Weather Station will search for a signal every night when reception is best. The WWVB radio station derives its signal from the NIST Atomic clock in Boulder, Colorado. A team of atomic physicists is continually measuring every second, of every day, to an accuracy of ten billionths of a second per day. These physicists have created an international standard, measuring a second as 9,192,631,770 vibrations of a Cesium-133 atom in a vacuum.

QUICK SET-UP GUIDE

Hint: Use good quality Alkaline Batteries and avoid rechargeable batteries.

1. Have the indoor station and outdoor remote 3 to 5 apart.
2. Batteries should be out of both units for 10 minutes.
3. Place the batteries into the **outdoor remote** first then into the indoor station.
(All outdoor remotes must be started before the indoor station)
4. **DO NOT PRESS ANY BUTTONS FOR 10 MINUTES.**

In this time the display and sensor will start to talk to each other and the display will show both the indoor temperature and an outdoor temperature. If the station does not display both temperatures after the 10 minutes please retry the set up as stated above. After both indoor and outdoor temperatures are displayed for 10 minutes you can place your sensor outdoors and set your time.

The remote sensor should be placed in a dry, shaded area. The remote sensor has a range of 80 feet. Any walls that the signal will have to pass through will reduce distance. An outdoor wall or window will have 20 to 30 feet of resistance and an interior wall will have 10 to 20 feet of resistance. Your distance plus resistance should not exceed 80 ft. in a straight line.

NOTE: Fog and mist will not harm your remote sensor but direct rain must be avoided.

To complete the set up of your temperature station after the 10 minutes have passed please follow the steps on page 9 and 10.


***Note:** The Remote Control Sender transmits a signal every 3 minutes; after the batteries have been installed, the Weather Station will search for the signal for a duration of 5 minutes. If there is no temperature reading in the OUTDOOR LCD after 5 minutes, make sure the units are within range of each other, or repeat the battery installation procedure. If a button is pressed before the weather station receives the temperature signal, you will need to follow the battery installation procedure again.*

DETAILED SET-UP GUIDE

I. BATTERY INSTALLATION


A. REMOTE CONTROL SENDER

1. Remove the mounting bracket. The bracket snaps on and off easily.
2. Remove the battery cover, by sliding the cover down.
3. Observing the correct polarity install 2 AA batteries. The batteries will fit tightly (to avoid start-up problems make sure they do not spring free).
4. Replace the battery cover by sliding upwards. Be sure battery cover is on securely.



B. WEATHER STATION

1. Remove the battery cover. To do this, insert a solid object in the space provided at the lower-central position of the battery cover, then push up and pull out on the battery cover.
2. Observe the correct polarity, and install 2 AA batteries.
3. Replace the battery cover.



Note: Immediately after the batteries have been installed, the LCD (Liquid Crystal Display) will flash, and a tone will sound. Within a few seconds the indoor temperature, indoor relative humidity, and the weather icons (sun and clouds) will be displayed. If not, remove batteries for 10 seconds and reinstall. If the outdoor temperature is not displayed within four minutes, remove batteries from both units, wait 10 seconds, and reinstall making sure to install batteries into the sensor first. The time will show -:- and start searching for the signal. If it successfully receives the time signal (usually at night), it will display the


correct time (default time-zone is Eastern). You will need to adjust the time zone to match your local time.

PROGRAM MODE

Programming Note: *If 30 seconds is allowed to pass, or either the IN or the OUT buttons are pressed during programming modes the unit will confirm/set the last information entered—the display will stop flashing and return to normal time-date readings. If you don't leave the program mode during the programming of sections III through VIII, you can advance to step 3 of the next program setting. If you do leave the program setting (or want to program a specific setting) follow each instructional step to program that setting.*

I. FUNCTION KEYS

The function keys are located on the front of the unit directly below the LCD.



II. 12 OR 24 HOUR TIME SETTING

1. Press and hold the *SET* button for 3 seconds, or until “12 h” flashes in the DATE LCD.
2. Press and release the *CH* button to toggle between 12 and 24-hour time.
3. Press and release the *SET* button to confirm the 12/24-hour setting, and to advance to Time Zone Setting.

III. TIME ZONE SETTING

The default time zone is EST, “-5hr” (Eastern Standard Time), to change this setting:

1. Press and hold the *SET* button for 3 seconds, or until “12 h” OR “24 h” flashes in the DATE LCD.
2. Press and release the *SET* button 1 more time to enter the Time Zone setting mode. The default Time Zone “-5” will flash in the DATE LCD.

3. Select your appropriate time zone using the *CH* button. During selection of the Time Zone, the 3 letter abbreviations for the time zones found in North America will flash across the top of the TIME LCD. Observe the chart below, showing the corresponding abbreviations, time zones, and codes.

TIME ZONES

	GMT	0
	Atlantic	-4
EST;	Eastern	-5
CST;	Central	-6
MST;	Mountain	-7
PST;	Pacific	-8
ALA;	Alaska	-9
HAW;	Hawaii	-10

Note: *There are more time zones represented by numbers than there are represented by 3 letter abbreviations. If you live in North America you need only be concerned with the ones in the chart above.*

4. Press and release the *SET* button to confirm, and advance to the Daylight Saving Time setting.

IV. DAYLIGHT SAVING TIME (DST) SETTING

1. Press and hold the *SET* button for 3 seconds, or until “12 h” or “24 h” flashes in the DATE LCD.
2. Press and release the *SET* button 2 more times to reach the DST selection mode. “DST 1” is the default setting and will be flashing in the DATE LCD.
3. Press and release the *CH* button to select “DST 0” or “DST 1.”
4. “DST 0” indicates that the feature is off and the WWVB will not change times automatically. “DST 1” indicates that the feature is on and the WWVB will change times automatically.

Note: *Some locations (Arizona and parts of Indiana) do not follow Daylight Saving Time, and should select “DST 0.”*

5. Press and release the *SET* button to confirm and advance to the Time setting mode.

V. TIME

There are two methods by which the time and date can be set:

- A) Automatically via WWVB reception, or
- B) Manually.

A. WWVB (Remote Control Time)

This method requires you to do nothing, except wait for the signal to be received, and to select a time zone. Reception usually takes approximately 6-10 minutes during optimal conditions. The best conditions for reception is at night, between midnight and 6:00 am—when there is less atmospheric interference. To keep your time as accurate as possible, the Weather Station conducts a WWVB search every night between these hours, and overrides any manually set time. The WWVB tower icon (appearing in the TIME LCD) will flash when a signal-search is in progress and a signal is being received, and will remain steady when the signal has been received. If the WWVB time has not been received after 10 minutes of battery installation, you may manually set the time or leave the time function alone (reception will occur regardless).

B. MANUAL TIME SETTING

1. Press and hold the *SET* button for 3 seconds or until “12h” flashes in the DATE LCD.
2. Press and release the *SET* button 3 more times (until the hour digit flashes in the TIME LCD).
3. Press and release the *CH* button to change the hour. Press the *CH* button once and the hour will increase by one, twice and the hour will increase by two, etc.
4. Press and release the *SET* button to confirm the hour setting, and to advance to the minute setting mode.

5. The minute digits should be flashing. Press the *CH* button to change the minutes—increasing the minutes by increments of 1 with each press of the *CH* button.
6. Press and release the *SET* button to confirm the minutes and to advance to the Day, Date, and Year setting mode.

Note: *In 12h mode, “PM” will appear to the left of the time during PM hours. If the time is not within the PM hours, nothing will be displayed. Be sure to set the time to the correct AM/PM time to ensure automatic reception at optimal times.*

VI. SETTING THE DAY, DATE, AND YEAR

Note: *Reception of the WWVB signal will also set the date and day. The reception of the signal will override any programmed date and day.*

1. Press and hold the *SET* button for 3 seconds, or until “12 h” or “24 h” flashes in the DATE LCD.
2. Press and release the *SET* button 5 more times to reach the Weekday setting mode.

Note: “MO” (representing Monday) is the default setting for the weekday, “1.1” is the default setting for the numeric month and day, and “1999” is the default setting for the year. The day, date, and year will be automatically set once the WWVB signal is received. However, the day, date, and year can be manually set and will flash respectively in the DATE LCD during manual programming.

3. The weekday will be flashing in the DATE LCD, press the *CH* button to change the weekday.
4. Press and release the *SET* button to confirm, and to enter the numeric-month setting mode.
5. The numeric-month will be flashing in the DATE LCD. Use the *CH* button to set to the current month.
6. Press and release the *SET* button to confirm the numeric-month, and to enter the numeric-day setting mode.

7. The numeric-day will be flashing, use the *CH* button to set the current day.
8. Press and release the *SET* button to confirm and to enter the year setting mode.
9. The default-year will be flashing, use the *CH* to set the appropriate year.
10. Press and release the *SET* button to confirm and to advance to the °F or °C setting mode.


VII. SELECTING °F OR °C

1. Press and hold the *SET* button for 3 seconds, or until “12h” or “24h” flashes in the DATE LCD.
2. Press and release the *SET* button 9 times to reach the °F or °C setting mode.
3. “°F” is the default setting, and should be flashing in the DATE LCD.
4. Press and release the *CH* button to shift °F to °C, and back.
5. Press the *SET* button to confirm your selection, and to advance to the LCD contrast setting.

VIII. SETTING THE LCD CONTRAST

1. Press and hold the *SET* button for 3 seconds, or until “12h” or “24h” flashes in the DATE LCD.
2. Press and release the *SET* button 10 more times to reach the LCD contrast setting mode.
3. The default setting—“Lcd 5”—will flash in the DATE LCD.
4. There are 8 LCD contrast levels to choose from—“Lcd 0” is the lightest, and “Lcd 7” is the darkest.
5. Press and release the *CH* button to toggle through the settings.
6. Press and release either the *IN* or *OUT* buttons to confirm all the settings and to exit the manual-programming mode (or wait 15 seconds for the unit to automatically return to the normal display mode).

FEATURES OF THE WS-7014U

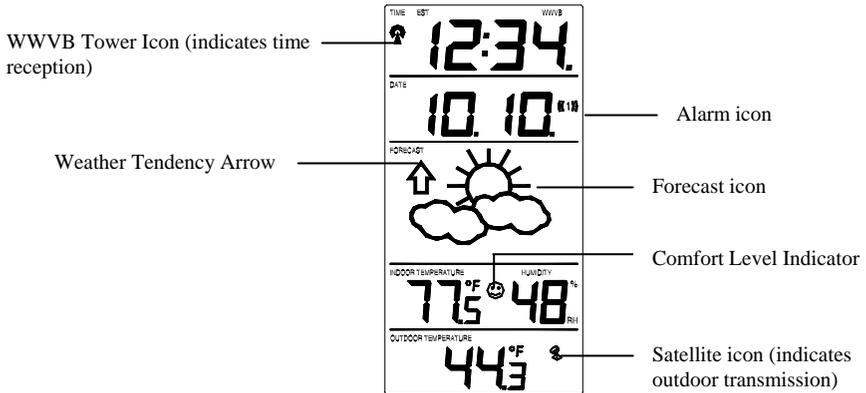


I. WEATHER FORECAST

The weather forecasting feature is estimated to be 75% accurate. The weather forecast is based solely upon the change of air pressure over time. The WS-7014U averages past air-pressure readings to provide an accurate forecast—creating a necessity to disregard all weather forecasting for 12-24 hours after the unit has been set-up, reset, or moved from one altitude to another (i.e. from one floor of a building to another floor). In areas where the weather is not affected by the change of air pressure, this feature will be less accurate.

A. WEATHER ICONS

There are 3 possible weather icons that will be displayed in the FORECAST LCD:

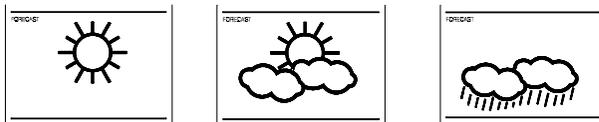

Sunny—indicates that the weather is expected to improve (not that the weather will be sunny).

Sun with Clouds—indicates that the weather is expected to be fair (not that the weather will be sunny with clouds).

Clouds with Rain—indicates that the weather is expected to get worse (not that the weather will be rainy).

The weather icons change when the unit detects a change in air pressure. The icons change in order, from “sunny” to “partly sunny” to “cloudy” or the reverse. It will not change from “sunny” directly to “rainy”, although it is possible for the change to occur quickly. If the symbols do not change then the weather has not changed, or the change has been slow and gradual.

B. WEATHER TENDENCY ARROWS

Other possible displays in the FORECAST LCD are 2 weather tendency arrows, one that points up (on the left side of the LCD) and one that points down (on the right side of the LCD). These arrows reflect current changes in the air pressure. An arrow pointing up indicates that the air pressure is increasing and the weather is expected to improve or remain good, an arrow pointing down indicates that the air pressure is decreasing and the weather is expected to become worse or remain poor. No arrow means the pressure is stable.

II. INDOOR TEMPERATURE, HUMIDITY, AND COMFORT LEVEL INDICATOR

The current Indoor Temperature (viewed on the left) and Relative Humidity (viewed on the right) are displayed in the INDOOR LCD. The Comfort Level Indicator is located at the center of the INDOOR LCD. The indicator will display a happy face icon when the temperature is between 68°F and 79°F (20°C and 25.9°C), and the humidity is between 45% and 64%. A sad face icon will be displayed when the temperature and humidity are outside the mentioned ranges.

III. OUTDOOR TEMPERATURE

The temperature received from the Remote Control Sender is viewed in the OUTDOOR LCD. When there is more than one Remote Control Sender unit in operation, a “boxed” number will appear to the right of the temperature. This indicates which Remote Control Sender unit (1, 2, or 3) is currently displaying its data in the OUTDOOR LCD. (This feature is explained in further detail in section VI—*Adding Outdoor Remote Control Senders*).

IV. MINIMUM AND MAXIMUM TEMPERATURE RECORDS

The WS-7014U keeps a record of the MINIMUM and MAXIMUM temperature, and the time and date of their occurrence—for both the indoor and outdoor modes.

A. VIEWING THE INDOOR TEMPERATURE RECORDS

1. Press the *IN* button once. “MIN” appears in the upper-center location of the flashing INDOOR LCD, indicating that the minimum temperature (along with the humidity measured at that time) and the time and date of occurrence are displayed. The minimum records will display for 20 seconds.
2. Press the *IN* button again (once while “MIN” is still displayed, twice otherwise). “MAX” appears in the upper-center location of the flashing INDOOR LCD, indicating that the maximum temperature (along with the humidity measured at that time) and the time and date of occurrence are displayed.
3. While “MAX” is still displayed press the *IN* button again to return to the current data display. Or you can wait 20 seconds, during either the minimum or the maximum readings, and the unit will automatically return to current data readings.

B. VIEWING THE OUTDOOR TEMPERATURE RECORDS

1. Press the *OUT* button once. “MIN” appears in the upper-center location of the flashing OUTDOOR LCD, indicating that the minimum temperature, and the time and date of occurrence are displayed. The minimum records will display for 20 seconds.
2. Press the *OUT* button again (once while “MIN” is still displayed, twice otherwise). “MAX” appears in the upper-center location of the flashing OUTDOOR LCD, indicating that the maximum temperature and the time and date of occurrence are displayed.
3. While “MAX” is still displayed press the *OUT* button again to return to the current data display. Or you can wait 20 seconds, during either the minimum or the maximum readings, and the unit will automatically return to current data readings.

C. RESETTING THE MIMIMUM AND MAXIMUM RECORDS

1. All the Indoor records (minimum and maximum) will be reset after the *IN* button is pressed and held for 5 seconds.
2. All the Outdoor records (minimum and maximum) will be reset after the *OUT* button is pressed and held for 5 seconds.

V. ADDING OUTDOOR REMOTE CONTROL SENDERS (OPTIONAL)

The WS-7014U is able to receive signals from 3 different Remote Control Senders. The Remote Control Sender model(s) that you choose will come with their own set of instructions—follow these instructions for a complete guide to setting up. Following are some brief instructions for the basic set-up of Remote Control Sender units with the WS-7014U. These extra sensors can be purchased through the same dealer as this unit, or by contacting La Crosse Technology directly. A TX6U will monitor temperature only, a TX3U will monitor temperature and display the temperature on its LCD, and the TX3UP will monitor the temperature via a probe for use in pools, spas, etc.

Note: When setting up multiple units it is important to remove the batteries from all existing units in operation, then to insert batteries first into all the Remote Control Sender units, and in numeric sequence. Second install batteries into the Indoor Temperature Station. Transmission problems will arise if this is not done correctly and if the total time for set-up exceeds 6 minutes.

A. SET-UP OF MULTIPLE UNITS

1. It is necessary to remove the batteries from all units currently in operation.
2. Remove the battery covers to all Remote Control Sender units.
3. Place all Remote Control Sender units in a numeric sequential order.
4. In sequential order, install batteries (follow the same battery installation procedures seen in section I. A) of the Detailed Set-Up Guide).
5. Install batteries into the Indoor Temperature Station.
6. Follow the Detailed Set-Up Guide for programming and operating instructions.

B. VIEWING AND OPERATING WITH MULTIPLE REMOTE CONTROL SENDER UNITS

1. To view the temperature of a different Remote Control Sender unit, press the *CH* button. A shift from one “boxed” number to the next should be observed in the OUTDOOR LCD.
2. To view the Minimum/Maximum temperature: first select which Remote Control Sender to read data from (indicated by the “boxed” number), then press the *OUT* button. Pressing this button once will display the minimum temperature, and the date and time the data was recorded. Pressing this button a second time (while “MIN” is still displayed, otherwise press the button twice) will display the same data for the maximum recordings.
3. To reset the Minimum/Maximum readings, it is necessary to select which Remote Control Sender you wish to reset. Press and hold the *OUT* button for 5 seconds, the records for the selected Remote Control Sender unit will be reset.

MOUNTING

Note: Before permanently mounting ensure that the Indoor Temperature Station is able to receive WWVB signals from the desired location. Also, extreme and sudden changes in temperature will decrease the accuracy of the Weather Station, and changes in elevation will result with inaccurate weather forecasting for the next 12 to 24 hours. These changes will require a 12 to 24 hour wait before obtaining reliable data. To achieve a true temperature reading, avoid mounting where direct sunlight can reach the Remote Control Sender or Weather Station. While the Remote Control Sender is weather proof, avoid submersion in water or snow. We recommend that you mount the Remote Control Sender on an outside North-facing wall. The sending range is 80ft—obstacles such as walls, concrete, and large metal objects can reduce the range. Place both units in their desired location, and wait approximately 10 minutes before permanently mounting to ensure that there is proper reception. The Indoor Weather Station should display a temperature in the OUTDOOR LCD within 4 minutes of setting up.

I. THE REMOTE CONTROL SENDER

The Remote Control Sender can be mounted in two ways:

- with the use of screws, or
- using the adhesive tape.

A. MOUNTING WITH SCREWS

- 1) Remove the mounting bracket from the Remote Control Sender.
- 2) Place the mounting bracket over the desired location. Through the three screw holes of the bracket, mark the mounting surface with a pencil.
- 3) Where marked, start the screw holes into mounting surface.
- 4) Screw mounting bracket onto the mounting surface. Ensure that the screws are flush with the bracket.

B. MOUNTING WITH ADHESIVE TAPE

- 1) With a nonabrasive solution, clean and dry the back of the mounting bracket and the mounting surface to ensure a secure hold. The mounting surface should be smooth and flat.
- 2) Remove the protective strip from one side of the tape. Adhere the tape to the designated area on the back of the mounting bracket.
- 3) Remove the protective strip from the other side of the tape. Position the Remote Control Sender in the desired location, ensuring that the Indoor Temperature Station can receive the signal.

II. THE INDOOR TEMPERATURE STATION

The Indoor Temperature Station can be mounted in two ways:

- with the table stand or,
- on the wall with the use of a wall hanging screw (not included).

A. USING THE TABLE STAND

- 1) The Indoor Temperature Station comes with the table stand already mounted. If you wish to use the table-stand all that is required is to place the Indoor Temperature Station in an appropriate location.

B. WALL MOUNTING

- 1) Remove the table-stand. To do this, pull down on the stand from the rear and rotate forward.
- 2) Fix a screw (not included) into the desired wall, leaving approximately 3/16 of an inch (5mm) extended from the wall.
- 3) Place the Indoor Temperature Station onto the screw using the hanging hole on the backside. Gently pull the Station down to lock the screw into place.

TROUBLESHOOTING

NOTE: *For problems not solved, please contact La Crosse Technology.*

Problem: No reception of WWVB time signal.

Solution: 1) Wait overnight for signal.

- 2) Be sure Weather Station is at least 6 feet from any electrical devices, such as televisions, computers, or other radio-controlled clocks.
- 3) Remove batteries for five minutes, reinsert and leave the unit alone overnight without pressing buttons.
- 4) If there are still problems, contact La Crosse Technology

Problem: Hour is incorrect (minute and date are correct)

Solution: Be sure correct time zone and daylight saving time settings are selected.

Problem: The LCD is faint

Solution: 1) Set the LCD contrast to a higher number

- 2) Replace batteries

Problem: No outdoor temperature is displayed.

Solution: 1) Remove all batteries, reinsert into sender first, then display.

- 2) Place remote sender closer to display.
- 3) Be sure all batteries are fresh.
- 4) Place Remote Control Sender and Weather Station in position so the straight-line signal is not passing through more than two or three walls.

Problem: Temperatures do not match if units are placed next to each other.

Solution: Each temperature sensor is manufactured to be accurate to within 1 degree plus or minus and under normal conditions, so two sensors could be as much as 2 degrees different. However, the difference can be exaggerated further because the sensors are designed for different working environments. The indoor sensor is less responsive to ambient air currents because of the shielding effect of the display's case. In addition, the case can act as a heat sink to absorb and store heat from external sources (i.e. handling of the case or radiant heat). Also, the much greater range of the outdoor temperature sensor requires a different calibration curve than the indoor range. Error is usually greater at the extreme ends of a range, making it harder to compare different ranges with different curves. Under non-laboratory conditions, it is difficult to compensate for the above factors and obtain an accurate comparison.

MAINTENANCE AND CARE INSTRUCTIONS

- Extreme temperatures, vibration, and shock should be avoided to prevent damage to the units.
- Clean displays and units with a soft, damp cloth. Do not use solvents or scouring agents; they may mark the displays and casings.
- Do not submerge in water.
- Immediately remove all low powered batteries to avoid leakage and damage.
- Opening the casings invalidates the warranty. Do not try to repair the unit. Contact La Crosse Technology for repairs.

SPECIFICATIONS

Temperature measuring range:	
Indoor:	32°F to 139.8°F with 0.2°F resolution. (0°C to 59.9°C with 0.1°C resolution). “OFL” displayed if outside this range.
Outdoor:	-21.8°F to 157.2°F with 0.2°F resolution. (-29.9°C to 69.9°C resolution). “OFL” displayed if outside this range.
Indoor relative humidity measuring range:	19% to 95% with 1% resolution. (“- -” displayed if outside this range).
Indoor Temperature checking interval:	Every 10 seconds.
Indoor Humidity checking interval:	Every 1 minute.
Outdoor Temperature checking interval (Remote Control Sender):	Every 1 minute.
Outdoor Temperature reception (Weather Station):	Every 5 minutes.
Transmission Range:	80 feet (in open space).
Power Supply:	
Weather Station:	2 x AA, IEC LR6, 1.5V.
Temperature Sensor:	2 x AA, IEC LR3, 1.5V.
Battery life cycle:	Approximately 12 months.
Recommended battery type:	Alkaline.
Dimensions (L x W x H)	
Weather Station (without stand):	3.54 x 1.18 x 5.43 in (90 x 30 x 138mm).
Temperature Sensor:	1.57“ x 0.9“ x 5.04“ (40 x 23 x 128 mm)

WARRANTY INFORMATION

La Crosse Technology, Ltd provides a 1-year limited warranty on this product against manufacturing defects in materials and workmanship.

This limited warranty begins on the original date of purchase, is valid only on products purchased and used in North America and only to the original purchaser of this product. To receive warranty service, the purchaser must contact La Crosse Technology, Ltd for problem determination and service procedures. Warranty service can only be performed by a La Crosse Technology, Ltd authorized service center. The original dated bill of sale must be presented upon request as proof of purchase to La Crosse Technology, Ltd or La Crosse Technology, Ltd's authorized service center.

La Crosse Technology, Ltd will repair or replace this product, at our option and at no charge as stipulated herein, with new or reconditioned parts or products if found to be defective during the limited warranty period specified above. All replaced parts and products become the property of La Crosse Technology, Ltd and must be returned to La Crosse Technology, Ltd. Replacement parts and products assume the remaining original warranty, or ninety (90) days, whichever is longer. La Crosse Technology, Ltd will pay all expenses for labor and materials for all repairs covered by this warranty. If necessary repairs are not covered by this warranty, or if a product is examined which is not in need or repair, you will be charged for the repairs or examination. The owner must pay any shipping charges incurred in getting your La Crosse Technology, Ltd product to a La Crosse Technology, Ltd authorized service center. La Crosse Technology, Ltd will pay ground return shipping charges to the owner of the product to a USA address only.

Your La Crosse Technology, Ltd warranty covers all defects in material and workmanship with the following specified exceptions: (1) damage caused by accident, unreasonable use or neglect (including the lack of reasonable and necessary maintenance); (2) damage occurring during shipment (claims must be presented to the carrier); (3) damage to, or deterioration of, any accessory or decorative surface; (4) damage resulting from failure to follow instructions contained in your owner's manual; (5) damage resulting from the performance of repairs or alterations by someone other than an authorized La Crosse Technology, Ltd authorized service center; (6) units used for other than home use (7) applications and uses that this product was not intended or (8) the products inability to receive a signal due to any source of interference.. This warranty covers only actual defects within the product itself, and does not cover the cost of installation or removal from a fixed installation, normal set-up or adjustments, claims based on misrepresentation by the seller or performance variations resulting from installation-related circumstances.

LA CROSSE TECHNOLOGY, LTD WILL NOT ASSUME LIABILITY FOR INCIDENTAL, CONSEQUENTIAL, PUNITIVE, OR OTHER SIMILAR DAMAGES ASSOCIATED WITH THE OPERATION OR MALFUNCTION OF THIS PRODUCT. THIS PRODUCT IS NOT TO BE USED FOR MEDICAL PURPOSES OR FOR

PUBLIC INFORMATION. THIS PRODUCT IS NOT A TOY. KEEP OUT OF CHILDREN'S REACH.

This warranty gives you specific legal rights. You may also have other rights specific to your State. Some States do not allow the exclusion of consequential or incidental damages therefore the above exclusion of limitation may not apply to you.

For warranty work, technical support, or information contact:

La Crosse Technology
2809 Losey Blvd. S.
La Crosse, WI 54601
Phone: 608.782.1610
Fax: 608.796.1020

e-mail:

support@lacrossetechnology.com
(warranty work)

sales@lacrossetechnology.com
(information on other products)

web:

www.lacrossetechnology.com

FCC ID: OMO-01RX (Receiver), OMO-01TX (sensor)

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:

- 1. THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND**
- 2. THIS DEVICE MUST ACCEPT INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION.**